

APOLLO

A400 APARTMENT COMPACTOR

FEATURES INCLUDE:

- I/4" INTEGRAL
 MAINFRAME / HOPPER
 DESIGN
- 3/8" A.R. FLOOR PLATE FOR LONGER LIFE
- CONTAINER SINGLE SIDE LATCH
- DUAL 3" BORE CROSS ARM CYLINDERS FOR ADDED COMPACTION AT END OF STROKE
- 80% AND IOO% FULL LIGHTS WITH AUTOMATIC SHUTDOWN
- KEY ON/OFF
 PHOTO EYE OPERATION
 MANUAL FOR/REV
 EMERGENCY STOP
 POWER ON LIGHT
- MICROPROCESSOR CONTROLS WITH EASY READ OUT FOR PROGRAMMING AND TROUBLESHOOTING.


UL LISTED CONTROL PANEL




THE ORIGINAL MINI COMPACTOR
CONTINUALLY IMPROVED SINCE 1987


PRODUCT DATA AND RATINGS

GENERAL COMPACTOR MODEL **APOLLO A400** CHAMBER CAPACITY - MFR 0.30 CU.YDS. CHAMBER CAPACITY - WASTEC 0.25 CU.YDS CHAMBER CLEAR TOP OPENING 24" x 30" TOP OPENING 36" x 30.5" RAM DIMENSIONS 18" x 30.5" OVERALL DIMENSIONS 45"L x 36"W x 67"H EST. SHIPPING WT.(INCL.POWER PACK) 1570 LBS PERFORMANCE CHARACTERISTICS CYCLE TIME 21 SECS. CAPACITY PER HOUR 60 CU.YDS. RAM PENETRATION 5" RAM FACE PRESSURE (N) @ 1600 PSI 41 PSI RAM FACE PRESSURE (M) @ 1800 PSI 46.5 PSI PACKING FORCE (N) @ 1600 PSI 22,500 LBS PACKING FORCE (M) @ 1800 PSI 25,500 LBS STRUCTURAL CHARACTERISTICS MAIN FRAME AND HOPPER 1/4" HRS PLATE **IMPACT PLATE** 1/4" HRS PLATE FLOOR PLATE 3/8" A.R.PLATE RAM FACE PLATE 3/8" HRS PLATE ELECTRICAL SPECIFICATIONS REMOTE POWER PACK DIMENSIONS 46"H x 22"W x 14"D MOTOR MOTOR POWER 208/230/460V, 3PH, 30 AMPS CONTROL VOLTAGE 120VAC (24VDC OPTION) CIRCUITS CONTROLLER ZELIO PLC PROCESSOR MONITORS 80% & 100% FULL PHOTO ELECTRIC EYE **OMRON E3K** DOOR SAFETY SWITCH **TELEMECANIQUE CONTROL PANEL UL LISTED** HYDRAULIC SPECIFICATIONS **CYLINDERS** DUAL 3" BORE, 2" ROD HYDRAULIC PUMP CAPACITY 6 GPM **OIL TANK CAPACITY** 12 GALS. **OPERATING PRESSURE** 1600 PSI RELIEF PRESSURE 1800 PSI MAXIMUM RATED PRESSURE 3000 PSI





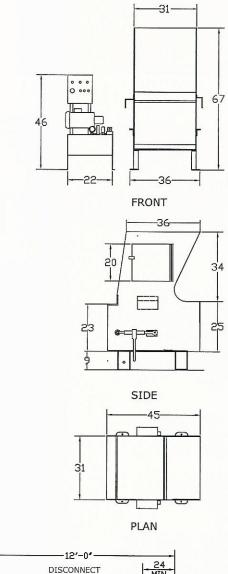



APOLLO WELDING AND FABRICATING, INC.

35600 CURTIS BLVD, EASTLAKE, OHIO 44095

PH: 440 942 0227

FAX: 440 942 0127

apollo@apollowelding.com

www.apollowelding.com

DISTRIBUTED BY: